



ZEMIC WÄGEZELLEN

WILEWSKI®

Engineering & Handelsvertretung

Type JB06



Short description

- Fit for 4- and 6-wire load cells
- Easy installation
- Cast aluminum housing
- Protective coating

Available models

Model	Amount of connections	Full article description	Part number
JB06	2	JB06C-2	3006010
	3	JB06C-3	3006020
	4	JB06C-4	3006030
	6	JB06C-6	3006040
	8	JB06C-8	3006050

Technical specifications JB06

Load cell output resistance range	Ω	340 to 1100
Load cell input resistance range	Ω	340 to 1100
Excitation, recommended voltage	V(AC&DC)	5 to 17
Excitation, maximum	V(AC&DC)	18
Load cell sensitivity range	mV/V	0.6 – 3
Cable $\varnothing$	mm	5 to 6.2
Correction method		Signal trim
Trimming range	Ω	14
Temperature range, operating	$^{\circ}\text{C}$	-40...+85
Ingress protection		IP65
Housing connected to shield		Yes
External grounding		Yes

Specifications and dimensions are subject to change without notice and do not constitute any liability whatsoever.




ZEMIC WÄGEZELLEN

WILEWSKI®

Engineering & Handelsvertretung

Type JB06

Dimensions in mm

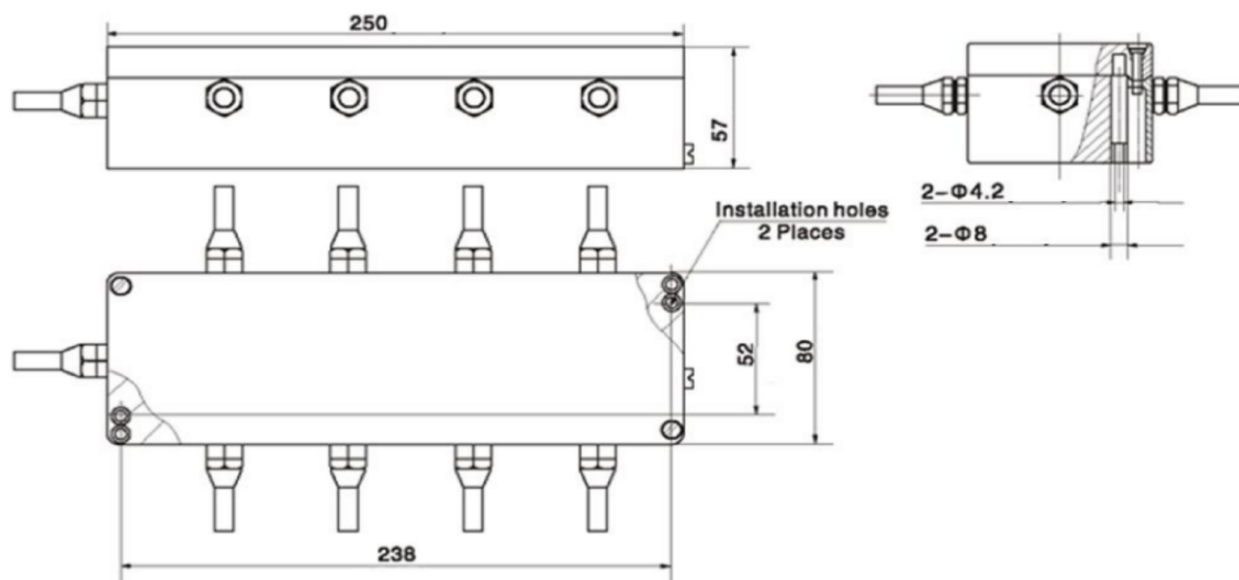

Specifications and dimensions are subject to change without notice and do not constitute any liability whatsoever.